

DECT baseband controllers


PCD5090; PCA5097

INTRODUCTION

This data sheet details the specific features of the:

PCD5090/xxx; DSP-ROM, with external ROM

PCA5097/xxx; DSP-ROM, with Field Electronically Erasable Programmable Read Only Memory (FEEPROM).



FEATURES

General

- The PCx509x is designed for GAP-compliant handsets and simple base stations
- Embedded 80C51 microcontroller with twice the performance of the classic architecture, up to 128 kbytes external memory or 64 kbytes FEEPROM program memory and 3 kbytes of data memory on chip. In addition there is 1 kbyte of on-chip data memory that is shared with on-chip Burst Mode Logic (BML) and DSP, the System Data RAM (SDR).
- 80C51 ports P0, P1, P2 and P3 available for interfacing to display, keyboard, I²C-bus, interrupt sources and/or external memory. External program memory is addressable up to 128 kbytes (PCD5090/xxx and PCA5097/xxx).
- Portable Part (PP) and Fixed Part (FP) modes
- TDMA frame (de)multiplexing; transmission or reception can be programmed for any slot
- Ciphering, scrambling, CRC checking/generation, protected B-fields
- Speech and data buffering space for six handsets
- Local call and B-field loop-back
- Two interrupt lines for BML and DSP to interrupt 80C51
- On-chip, three-channel time-multiplexed 8-bit Analog-to-Digital Converter (ADC) for RSSI measurement and battery voltage measurement. One channel available for other purposes.
- On-chip 8-bit DAC for frequency adjustment of 13.824 MHz on-chip crystal oscillator
- Phase error measurement and phase error correction by hardware
- Digital-to-Analog Converters (DACs) and ADCs for dynamic earpiece and dynamic or electret microphone
- On-chip reference voltage
- On-chip supply for electret microphone
- Very low ohmic buzzer output
- Serial interface to external ADPCM CODEC (PCD5032)
- IOM-2interface (Siemens registered trademark)
- Serial interface to synthesizer for frequency programming
- Programmable timing of radio-control signals
- Programmable polarity of radio-control signals
- Easy interfacing with radio circuits, operating at other supply voltage
- Programmable GMSK pulse shaper
- On-chip comparator for use as bit-slicer
- Power-on reset
- Low supply voltage (2.7 to 5.5 V)
- SACMOS technology.

DSP software features

- ADPCM encoding and decoding complying with G.721
- Speech filters
- Programmable gain in speech paths
- Side tone and soft mute
- Ringer and tone (DTMF) generator
- Dial tone detection
- Echo cancellation
- Automatic gain control
- Telephone Answering Machine (TAM) switch
- Conference call (PCD5090/400)
- Hands-free operation (PCD5090/311).

For each DSP software version a separate manual is available, in which detailed information is provided on how parameters must be set.

DECT baseband controllers

PCD5090; PCA5097

ORDERING INFORMATION

TYPE NUMBER	PACKAGE		
	NAME	DESCRIPTION	VERSION
PCD5090H	QFP100	plastic quad flat package; 100 leads (lead length 1.95 mm); body 14 × 20 × 2.8 mm	SOT317-2
PCA5097H			
PCD5090HZ	LQFP100	plastic low profile quad flat package; 100 leads; body 14 × 14 × 1.4 mm	SOT407-1

DECT baseband controllers

PCD5090; PCA5097

BLOCK DIAGRAM

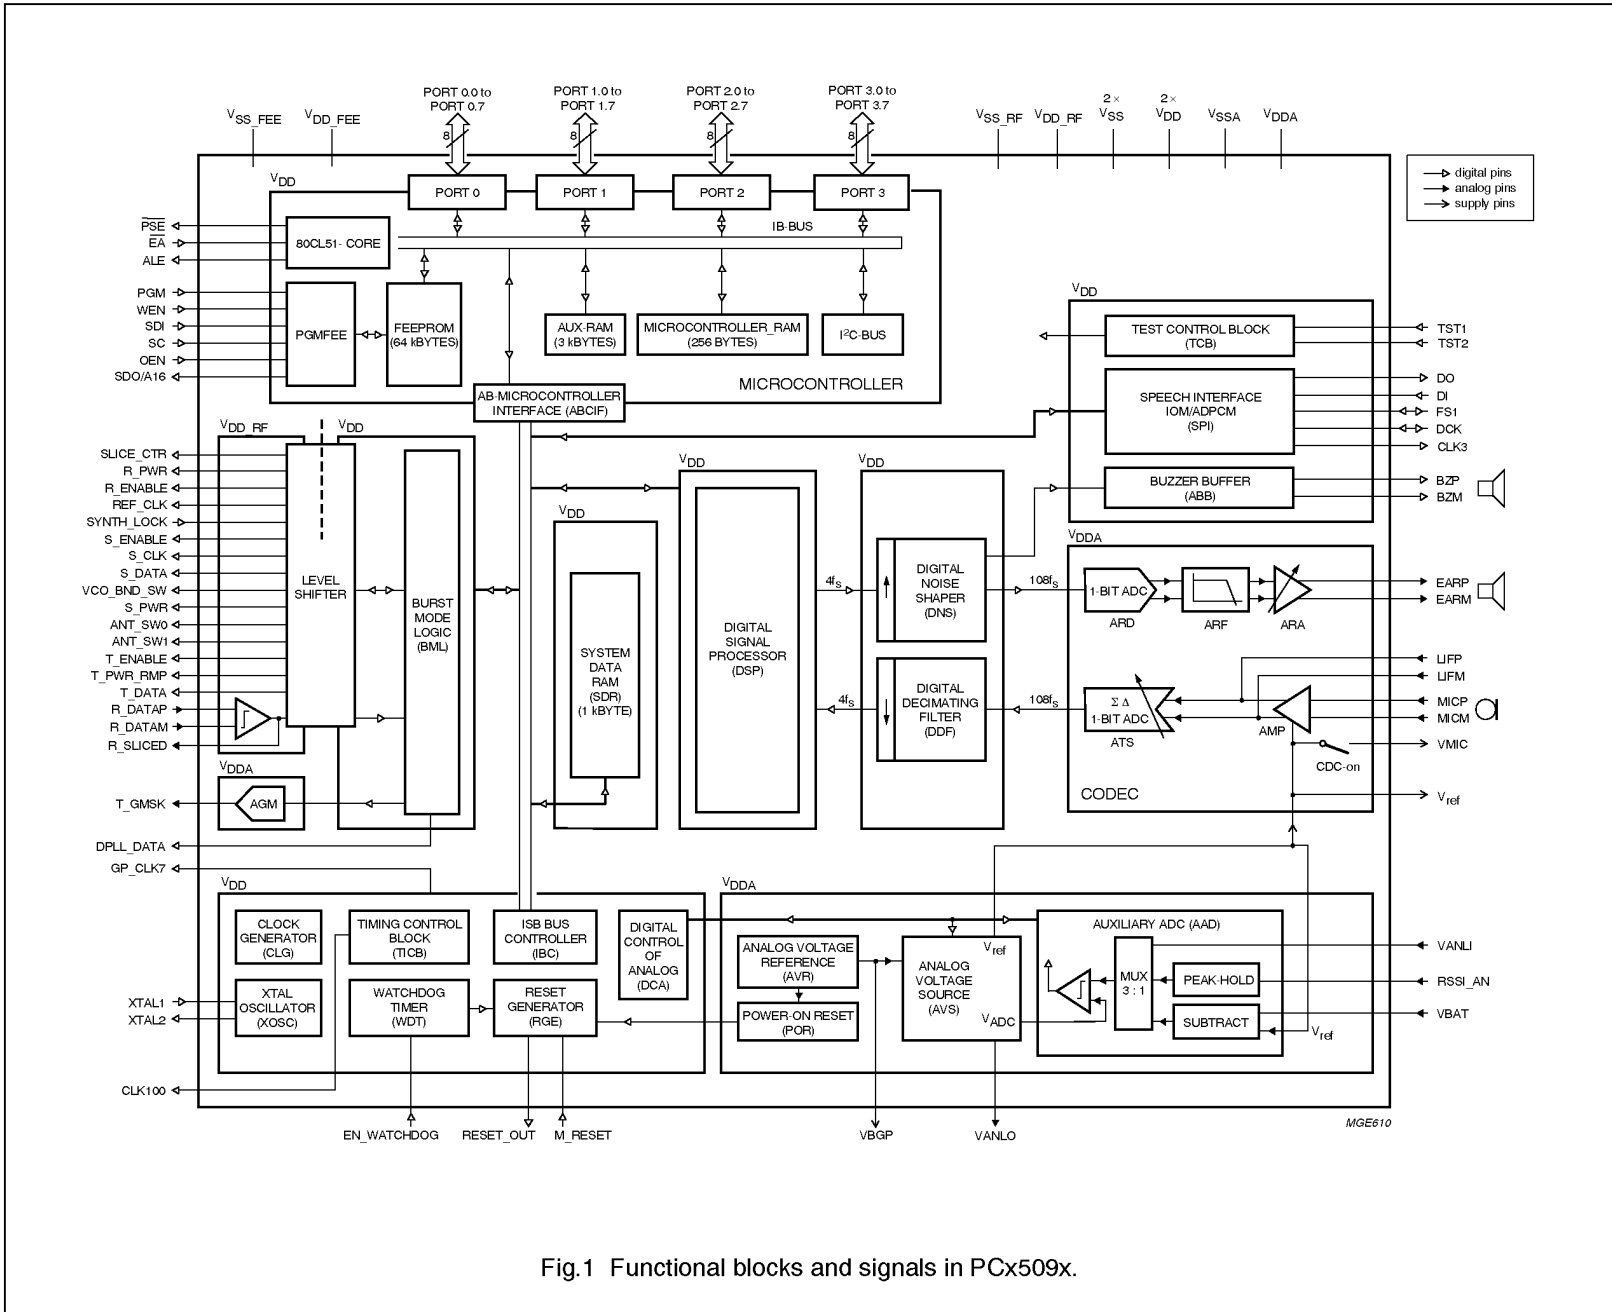


Fig.1 Functional blocks and signals in PCx509x.

DECT baseband controllers

PCD5090; PCA5097

PINNING

SYMBOL	PIN		I/O	STATE AFTER RESET	PIN TYPE	PIN DESCRIPTION
	QFP100	LQFP100				
ANT_SW1	1	99	O	H	ISP2DRF3	antenna switch 1 output
ANT_SW0	2	100	O	H	ISP2DRF3	antenna switch 0 output
CLK100	3	1	O	H	ISP2DPES	100 Hz signal related to DECT frame timing output
T_ENABLE	4	2	O	H	ISP2DRF3	enable transmitter output
T_PWR_RMP	5	3	O	L	ISP2DRF3	switch transmitter power output
T_DATA	6	4	O	off	ISF2DRF3	unmodulated transmitter data output
T_GMSK	7	5	O	L	ANAIOD1	GMSK modulated transmitter data output
VCO_BND_SW	8	6	O	L	ISP2DRF3	VCO band switch output
SYNTH_LOCK	9	7	I	–	DIPP0RF3	synthesizer lock input
S_ENABLE	10	8	O	L	ISP2DRF3	synthesizer enable output
S_DATA	11	9	O	L	ISP2DRF3	serial synthesizer data output
S_CLK	12	10	O	L	ISP2DRF3	clock for serial synthesizer interface output
S_PWR	13	11	O	H	ISP2DRF3	switch synthesizer power output
REF_CLK	14	12	O	running	ISP4DRF3	13.824 MHz reference clock for synthesizer output
V _{SS} _RF	15	13	–	–	supply	negative supply voltage for RF interface level shifters
V _{DD} _RF	16	14	–	–	supply	positive supply voltage for RF interface level shifters
V _{DD} _FEE	17	15	–	–	supply	positive supply voltage for FEEPROM program memory
SLICE_CTR	18	16	O	L	ISP2DRF3	switch slicer time constant output
R_PWR	19	17	O	H	ISP2DRF3	switch receiver power output
R_DATAP	20	18	I	–	ANAIOD2	positive input for receiver data
R_DATAM	21	19	I	–	ANAIOD2	negative input for receiver data
R_ENABLE	22	20	O	H	ISP2DRF3	enable receiver output
RSSI_AN	23	21	I	–	ANAIOD1	analog input for RSSI measurement
VANLI	24	22	I	–	ANAIOD1	analog input to A/D converter
VBAT	25	23	I	–	ANAIOD1	analog input for battery voltage measurement
CLK3	26	24	O	L	ISP2DPES	3.456 MHz clock output for external ADPCM codec
DCK	27	25	I/O	input	ISF2DPES ISF2UPES	ADPCM output or IOM data clock input/output (ISF2UPES in PCD5090/xxx, PCA5097/xxx)
DI	28	26	I	–	DIPP0PES	ADPCM or IOM data input

DECT baseband controllers

PCD5090; PCA5097

SYMBOL	PIN		I/O	STATE AFTER RESET	PIN TYPE	PIN DESCRIPTION
	QFP100	LQFP100				
FS1	29	27	I/O	input	ISF2DPES ISF2UPES	8 kHz framing input/output (ISF2UPES in PCD5090/xxx, PCA5097/xxx)
DO	30	28	O	off	ISI8DPES	ADPCM or IOM data output
XTAL2	31	29	O	running	ANAIOD1	crystal oscillator output
XTAL1	32	30	I	–	ANAIOD1	crystal oscillator input
VANLO	33	31	O	1.0 V	ANAIOD1	analog output from D/A converter
TST2	34	32	I	–	DIDP0PES	test input 2
TST1	35	33	I	–	DIDP0PES	test input 1
LIFM	36	34	I	0.7 V	ANAIOD1	negative input from line interface
LIFP	37	35	I	0.7 V	ANAIOD1	positive input from line interface
V _{SSA}	38	36	–	–	supply	negative supply voltage for analog circuits
MICM	39	37	I	0.7 V	ANAIOR1	negative input from microphone
MICP	40	38	I	0.7 V	ANAIOR1	positive input from microphone
VMIC	41	39	O	off	ANAIOD1	positive microphone supply voltage (+2 V)
V _{ref}	42	40	O	2.0 V	ANAIOD1	reference voltage (+2 V)
VBGP	43	41	O	1.25 V	ANAIOR1	bandgap output voltage (+1.25 V)
V _{DDA}	44	42	–	–	supply	positive supply voltage for analog circuits
EARM	45	43	O	1.4 V	ANAIOD1	negative output to earpiece
EARP	46	44	O	1.4 V	ANAIOD1	positive output to earpiece
EN_WATCHDOG	47	45	I	–	DIUP0PES	watchdog enable input
P1.0	48	46	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P1.1	49	47	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P1.2	50	48	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
GP_CLK7	51	49	O	L	ISP2DPES	general purpose 6.912 MHz output
DPLL_DATA	52	50	O	L	ISP2DPES	data after clock recovery network
R_SLICED	53	51	O	L	ISP2DPES	R_DATA comparator output
PGM	54	52	I	–	DIDP0PES	EEPROM programming mode; can be left open-circuit for PCA5090 and PCD5090/xxx
P1.3	55	53	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P1.4	56	54	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P1.5	57	55	I/O	H	ISQ2CPES	bidirectional 80C51 port pin

DECT baseband controllers

PCD5090; PCA5097

SYMBOL	PIN		I/O	STATE AFTER RESET	PIN TYPE	PIN DESCRIPTION
	QFP100	LQFP100				
P1.6	58	56	I/O	off	ISI8DPES	bidirectional 80C51 port pin
P1.7	59	57	I/O	off	ISI8DPES	bidirectional 80C51 port pin
V _{DD2}	60	58	–	–	supply	positive supply voltage
BZM	61	59	O	L	ANAIOD2	negative buzzer output
BZP	62	60	O	L	ANAIOD2	positive buzzer output
V _{SS2}	63	61	–	–	supply	negative supply voltage
V _{SS_FEE}	64	62	–	–	supply	negative supply voltage
P3.0	65	63	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P3.1	66	64	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P3.2	67	65	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P3.3	68	66	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P3.4	69	67	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P3.5	70	68	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P3.6	71	69	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P3.7	72	70	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P2.0	73	71	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P2.1	74	72	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P2.2	75	73	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
SDO/A16	76	74	O	H or L L	ISP4DPES	PCA5090,PCA5097: FEEPROM shift data output PCD5090/xxx, PCA5097/xxx: FEEPROM shift data out/address bit 16 for 128 kbytes external program memory
OEN	77	75	I	–	DIDP0PES	FEEPROM output enable; tie to V _{DD} for PCA5090, PCD5090/xxx
SC	78	76	I	–	DIDP0PES	FEEPROM shift clock; can be left open-circuit for PCA5090, PCD5090/xxx
SDI	79	77	I	–	DIDP0PES	FEEPROM shift data input; can be left open-circuit for PCA5090, PCD5090/xxx
WEN	80	78	I	–	DIUP0PES	FEEPROM Write enable; can be left open-circuit for PCA5090, PCD5090/xxx
P2.3	81	79	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P2.4	82	80	I/O	H	ISQ2CPES	bidirectional 80C51 port pin

DECT baseband controllers

PCD5090; PCA5097

SYMBOL	PIN		I/O	STATE AFTER RESET	PIN TYPE	PIN DESCRIPTION
	QFP100	LQFP100				
P2.5	83	81	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P2.6	84	82	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
P2.7	85	83	I/O	H	ISQ2CPES	bidirectional 80C51 port pin
$\overline{\text{PSE}}$	86	84	O	H	ISQ2CPES	program store enable (80C51)
ALE	87	85	O	H	ISQ4CPES	address latch enable (80C51)
$\overline{\text{EA}}$	88	86	I	–	ISF2DPES	external access enable (80C51)
V _{SS1}	89	87	–	–	supply	negative supply voltage
V _{DD1}	90	88	–	–	supply	positive supply voltage
P0.7	91	89	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
P0.6	92	90	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
P0.5	93	91	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
P0.4	94	92	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
P0.3	95	93	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
P0.2	96	94	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
P0.1	97	95	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
P0.0	98	96	I/O	off H	ISP2DPES ISQ2CPES	bidirectional 80C51 port pin (ISQ2CPES in PCD5090/xxx, PCA5097/xxx)
M_RESET	99	97	I	–	DIDP0PES	master reset input (Schmitt-trigger)
RESET_OUT	100	98	O	H	ISF2DPES	reset output

DECT baseband controllers

PCD5090; PCA5097

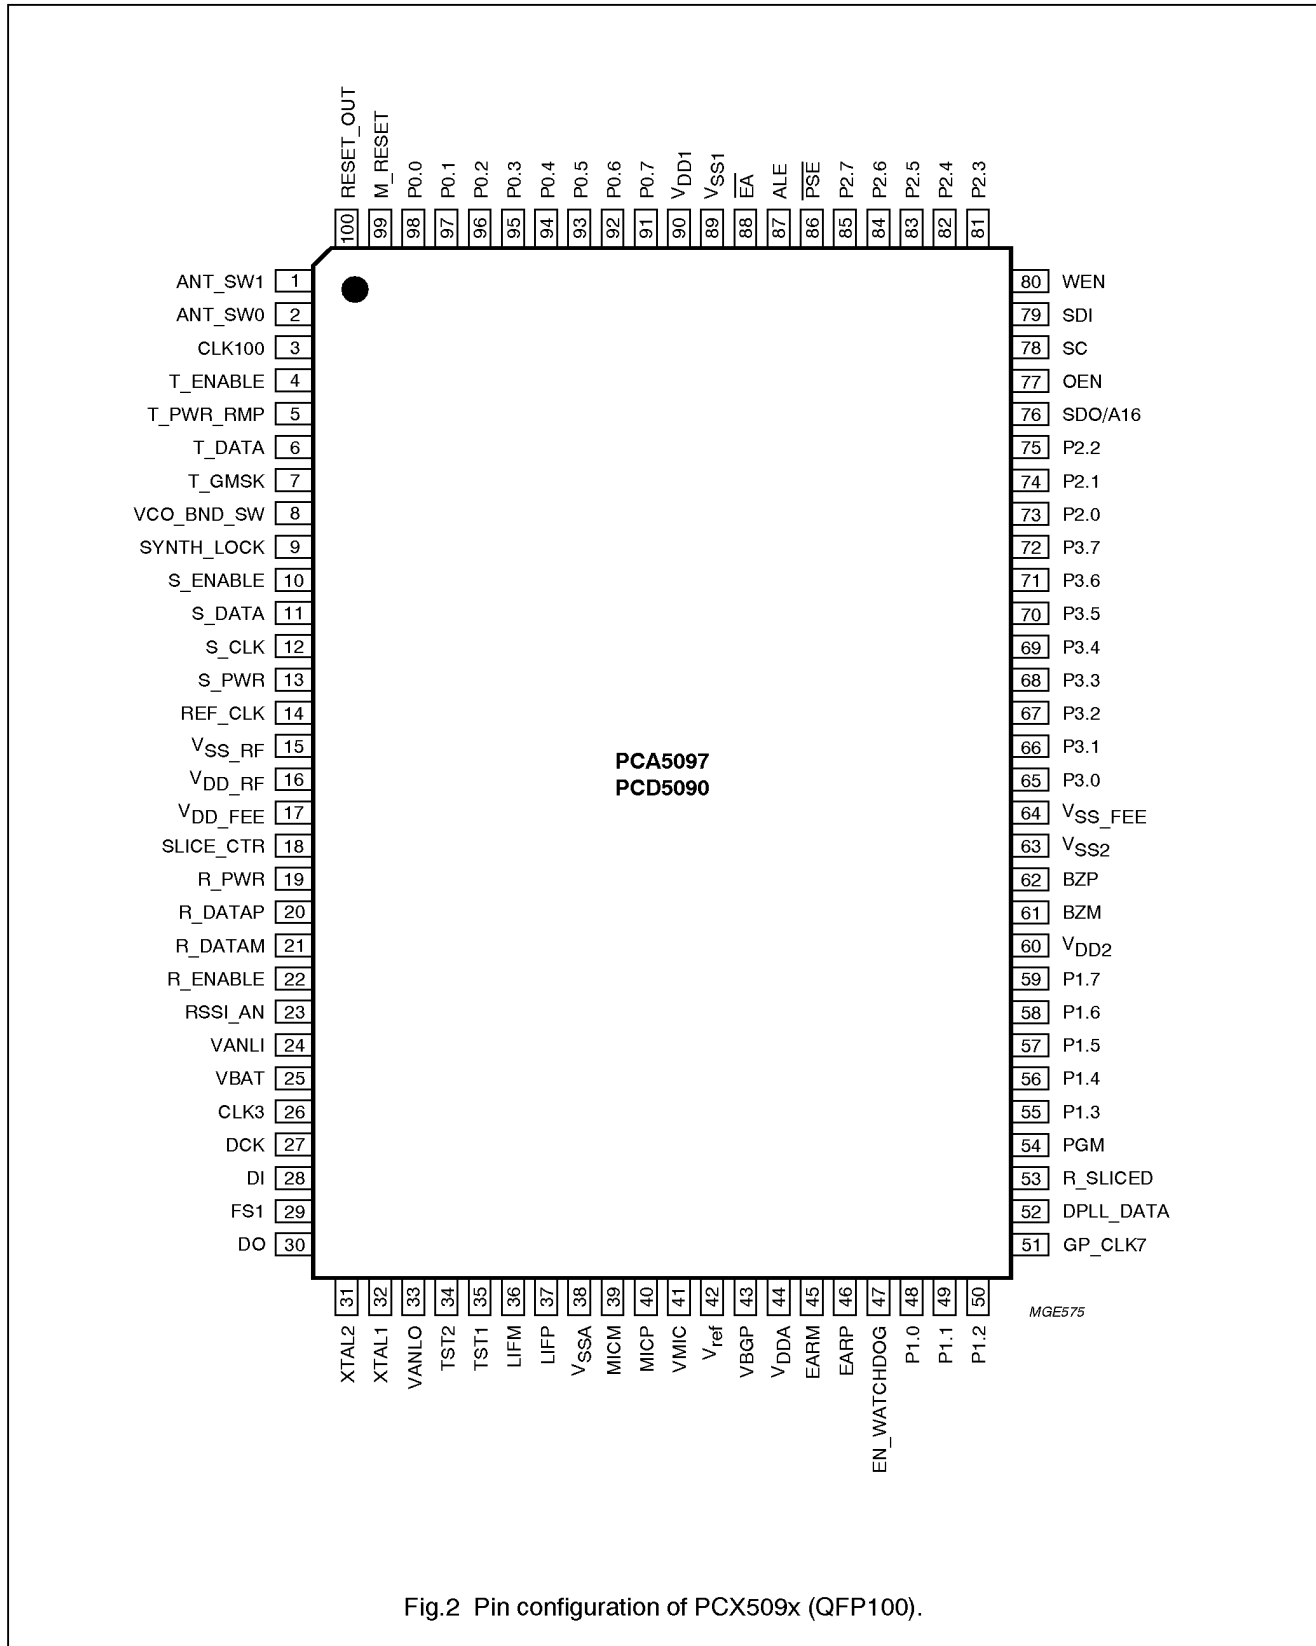


Fig.2 Pin configuration of PCX509x (QFP100).

DECT baseband controllers

PCD5090; PCA5097

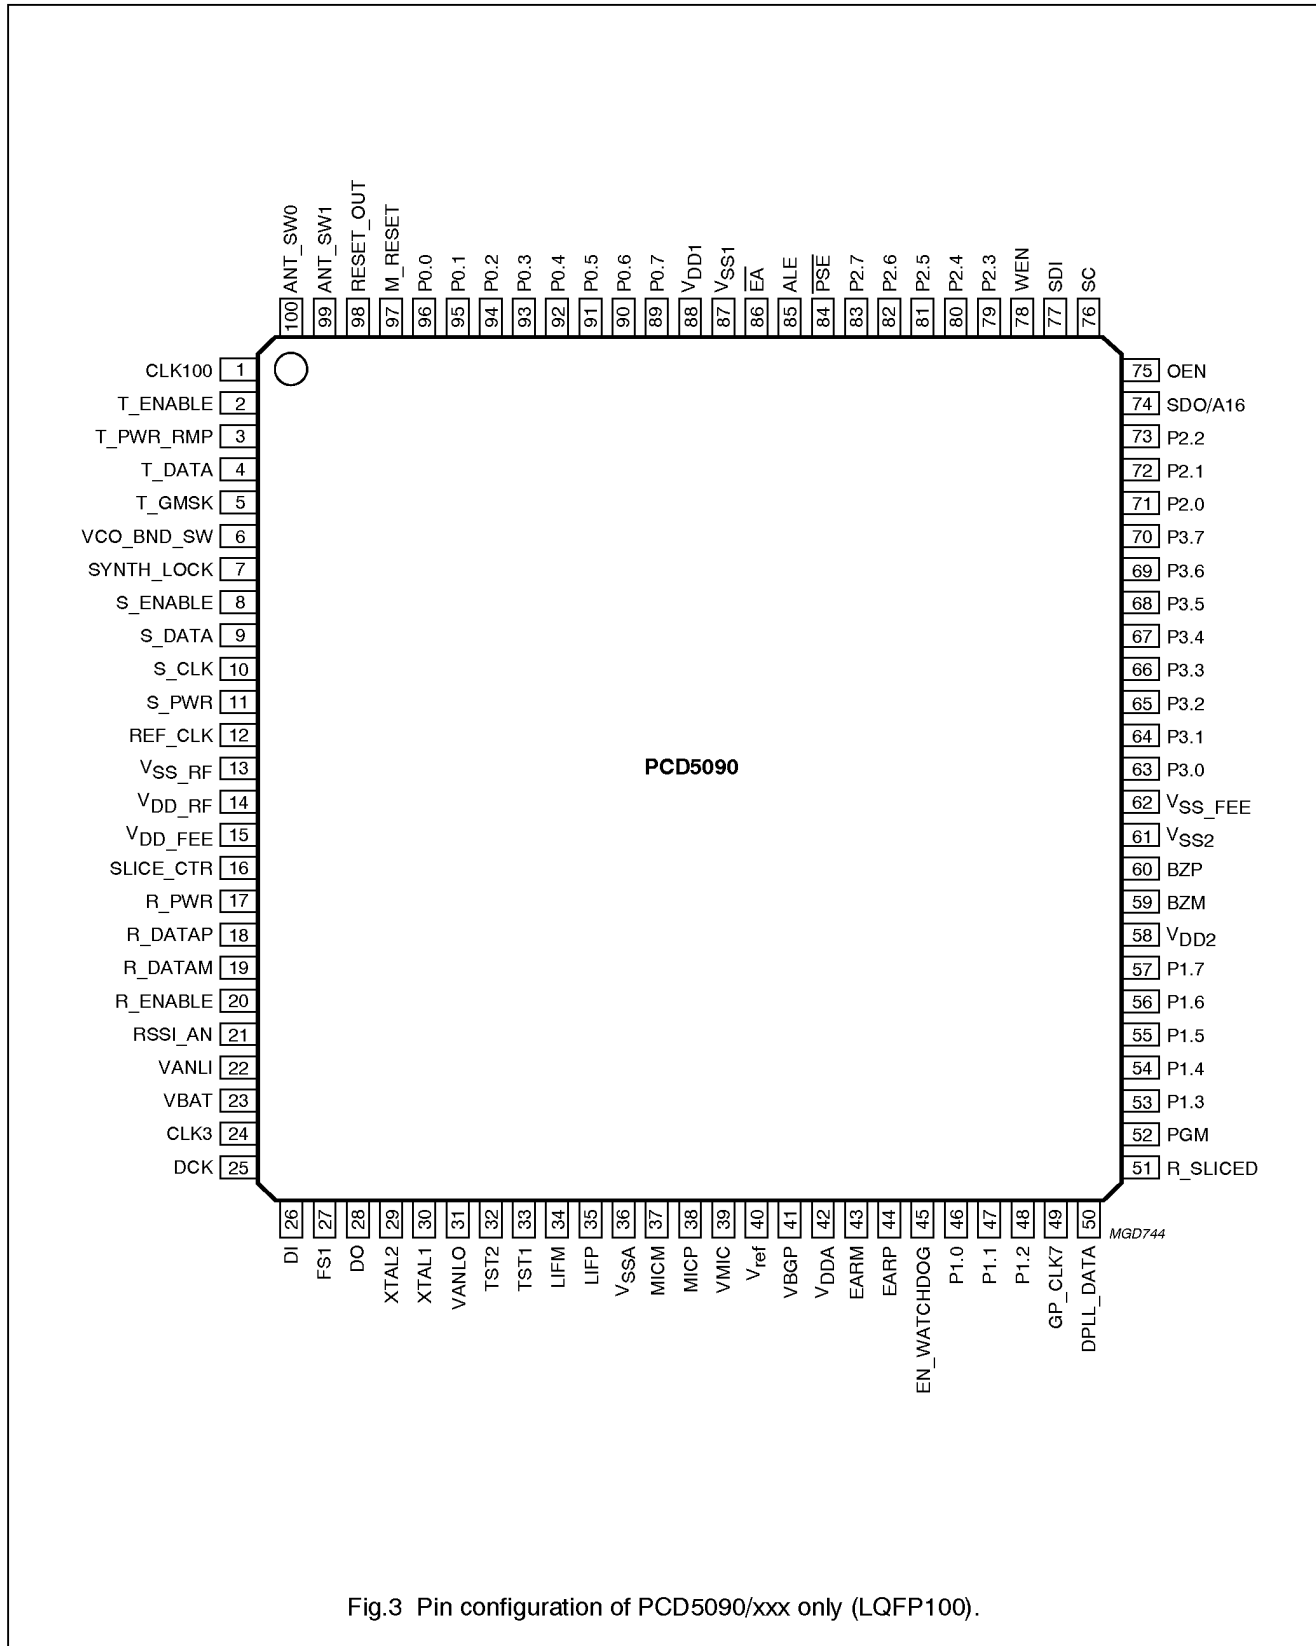


Fig.3 Pin configuration of PCD5090/xxx only (LQFP100).

DECT baseband controllers

PCD5090; PCA5097

FUNCTIONAL DESCRIPTION**DECT controller system description**

The PCX509x is a family of single-chip controllers, designed for use in Digital Enhanced Cordless Telecommunications (DECT) systems. The family is designed for minimal component-count and minimum power consumption. All controllers include an embedded 80C51 microcontroller with on-chip memory and I²C-bus. The Philips DECT RF-Interface is implemented. The Burst Mode Logic performs the time-critical MAC layer functions for applications in DECT handsets and base stations. The ADPCM transcoding is in compliance with the CCITT recommendation G.721 and includes receive and transmit filters.

Power-on reset logic and power management functions further reduce power consumption and external components. The chip is intended to support stand-alone systems only. There are no provisions to build clusters of base stations. There are no provisions for external controllers to exert control over the embedded 80C51 or to have direct access to the on-chip data memories.

The DECT controller consists of a number of functional blocks that operate more or less autonomously and communicate with each other via the System Data RAM (SDR). Blocks have access to SDR via the Internal System Bus (ISB). The ISB consists of an 8-bit data, a 10-bit address bus and a number of bus-request/bus-grant signals. Access to the ISB is controlled by ISB bus Controller (IBC). The IBC acknowledges bus requests on the basis of a priority scheme.

The embedded controller 80C51 is to be programmed by the user. It must contain DECT software from Man-Machine-Interface (MMI) to the DECT protocols TBC, CBC and DBC (refer to figures 10, 11, 12 and 13 in "*prETS 300 175-2:1992 section 6*"). All software is available from Philips Semiconductors.

Hardware state machines in the Burst Mode Logic (BML) and the Speech Interface (SPI) execute the lower blocks in the TBC, CBC and DBC. The 80C51 has control over the BML and the SPI via tables in SDR. The BML saves serial data, received via R_DATAP/M, in buffer areas in SDR. The position of buffers in SDR is fixed by the 80C51 software by means of tables previously mentioned.

A-fields and B-fields are stored in separate buffers. In this way, two traffic bearers, each with their private A-fields, can share the same B-field buffer as is required in case of bearer hand-over or local call.

The blocks DSP and CODEC support speech processing functions such as A/D- and D/A conversion, filtering, ADPCM encoding and decoding, 8-bit A-law PCM to 14-bit linear PCM conversion and its reverse, echo cancelling, tone generation, etc.

PCA5097

This chip is intended for program development. It contains 64 kbytes of internal program memory (FEEPROM) for the 80C51 and DSP program RAM.

PCD5090/xxx


This chip is intended for handset and base station applications. The DSP program is now fixed in a ROM, for which several ROM codes (/xxx) are available (handset, analog base, digital base). An external program memory for the 80C51 of 128 kbytes ROM can be handled.

PCA5097/xxx


This is the same as PCD5090/xxx, but there is 64 kbytes internal program memory (FEEPROM) for the 80C51. The DSP program is preprogrammed in ROM. This chip is meant for development purpose only.

DECT baseband controllers


PCD5090; PCA5097

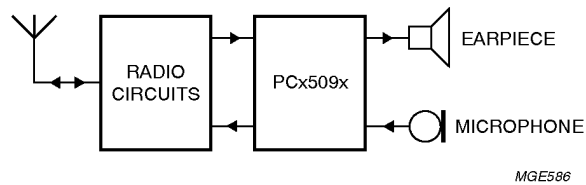

a. Handset.

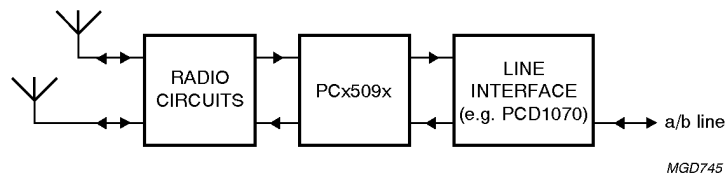

b. Base with analog interface and echo cancellation; up to 6 portables can be handled.

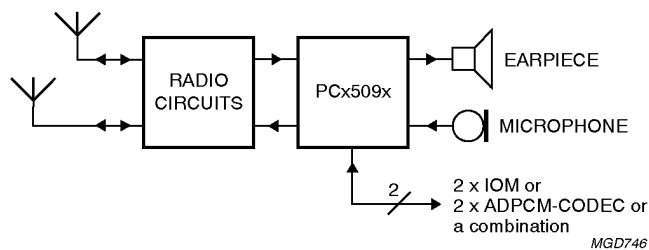

c. Base with digital interface and analog handset connected; up to 6 portables can be handled.

Fig.4 Block diagrams of DECT systems with PCx509x.