


NPN SILICON PLANAR EPITAXIAL TRANSISTORS

**2N2923/2N2924
2N2925**

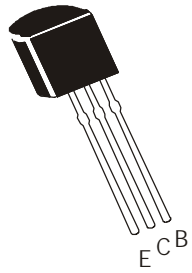

**TO-92
Plastic Package**

General Purpose Applications

ABSOLUTE MAXIMUM RATINGS (T_a=25°C unless specified otherwise)

| DESCRIPTION | SYMBOL | VALUE | UNITS |
|-----------------------------------|------------------|--------------|-------|
| Collector Base Voltage | V _{CBO} | 25 | V |
| Collector Emitter Voltage | V _{CEO} | 25 | V |
| Emitter Base Voltage | V _{EBO} | 5.0 | V |
| Collector Current (steady state) | *I _C | 100 | mA |
| Power Dissipation (Free air=25°C) | **P _D | 360 | mW |
| Power Dissipation (Free air=55°C) | **P _D | 250 | mW |
| Storage Temperature | T _{stg} | - 55 to +150 | °C |
| Junction Temperature | T _j | +125 | °C |

*Determined from power limitations due to saturation voltage at this current

**Derate 3.6mW/°C increase in ambient temperature above 25°C


ELECTRICAL CHARACTERISTICS (T_a=25°C unless specified otherwise)

| DESCRIPTION | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNITS | | |
|---------------------------|------------------|--|-----|-----|-----|-------|---------------|-----|
| Collector Cut off Current | I _{CBO} | V _{CB} =25V, I _E =0 | | | 0.1 | μA | | |
| | | V _{CB} =25V, I _E =0, T _a =100°C | | | 15 | μA | | |
| Emitter Cut off Current | I _{EBO} | V _{EB} =5V, I _C = 0 | | | 0.1 | μA | | |
| DC Current Gain | h _{FE} | V _{CE} =4.5V, I _C =2mA | | | | | | |
| | | | | | | | 2N2923 | 115 |
| | | | | | | | 2N2924 | 155 |
| | | | | | | | 2N2925 | 215 |

DYNAMIC CHARACTERISTICS


| DESCRIPTION | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNITS | | |
|---------------------------|------------------|--|-----|-----|-----|-------|---------------|-----|
| Small Signal Current Gain | h _{fe} | V _{CE} =10V, I _C =2mA, f=1kHz | | | | | | |
| | | | | | | | 2N2923 | 90 |
| | | | | | | | 2N2924 | 150 |
| | | | | | | | 2N2925 | 235 |
| Input Impedance | h _{ie} | V _{CE} =10V, I _C =2mA, f=1kHz | | 15 | | Ω | | |
| Collector Capacitance | C _{cbo} | I _E =0, V _{CB} =10V, f=1MHz | 4.5 | | 10 | pF | | |
| Transition Frequency | f _T | I _C =4mA, V _{CE} =5V | | 160 | | MHz | | |
| Noise Figure | NF | I _C =100μA, V _{CE} =5V, f=10kHz, BW=1Hz, R _g =2000Ω only 2N2925 | | 2.8 | | dB | | |

TO-92 Plastic Package

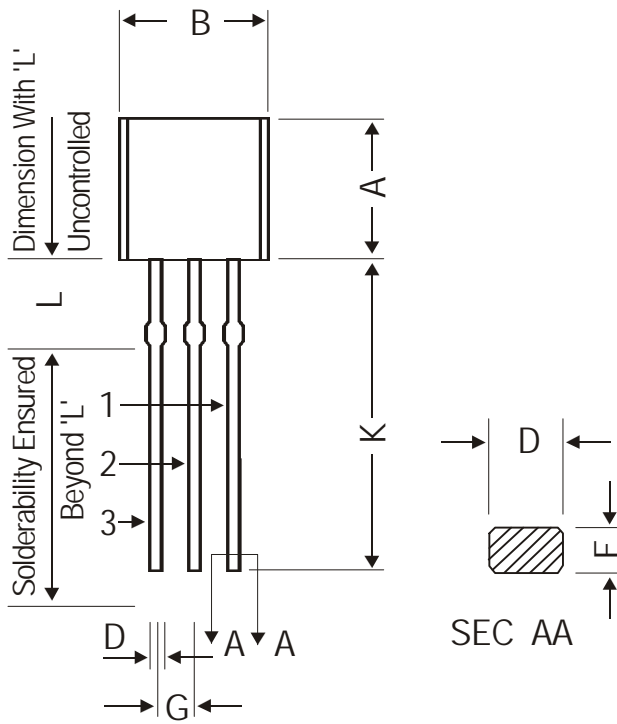


| DIM | MIN. | MAX. |
|-----|-------|-------|
| A | 4.32 | 5.33 |
| B | 4.45 | 5.20 |
| C | 3.18 | 4.19 |
| D | 0.41 | 0.55 |
| E | 0.35 | 0.50 |
| F | 5 DEG | |
| G | 1.14 | 1.40 |
| H | 1.20 | 1.40 |
| K | 12.70 | — |
| L | 1.982 | 2.082 |
| M | 1.03 | 1.20 |

All dimensions are in mm

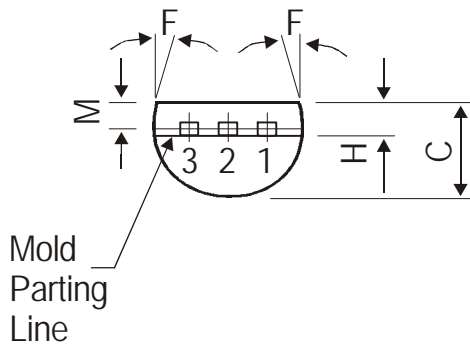

PIN CONFIGURATION

1. BASE
2. COLLECTOR
3. EMITTER

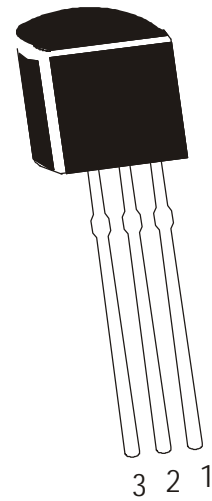


The TO-92 Package, Tape and Ammo Pack Drawings are correct as on the date of issue/revision of this Data Sheet.

The currently valid dimensions and information, may please be confirmed from the TO-92 Drawing in the Packages and Packing Section of the Product Catalogue.

Packing Details

| PACKAGE | STANDARD PACK | | INNER CARTON BOX | | OUTER CARTON BOX | | |
|------------|---------------|----------------|-------------------|-----|-------------------|-----|----------|
| | Details | Net Weight/Qty | Size | Qty | Size | Qty | Gr Wt |
| TO-92 Bulk | 1K/polybag | 200 gm/1K pcs | 3" x 7.5" x 7.5" | 5K | 17" x 15" x 13.5" | 80K | 23 kgs |
| TO-92 T&A | 2K/ammo box | 645 gm/2K pcs | 12.5" x 8" x 1.8" | 2K | 17" x 15" x 13.5" | 32K | 12.5 kgs |

TO-92 Tape and Ammo Pack

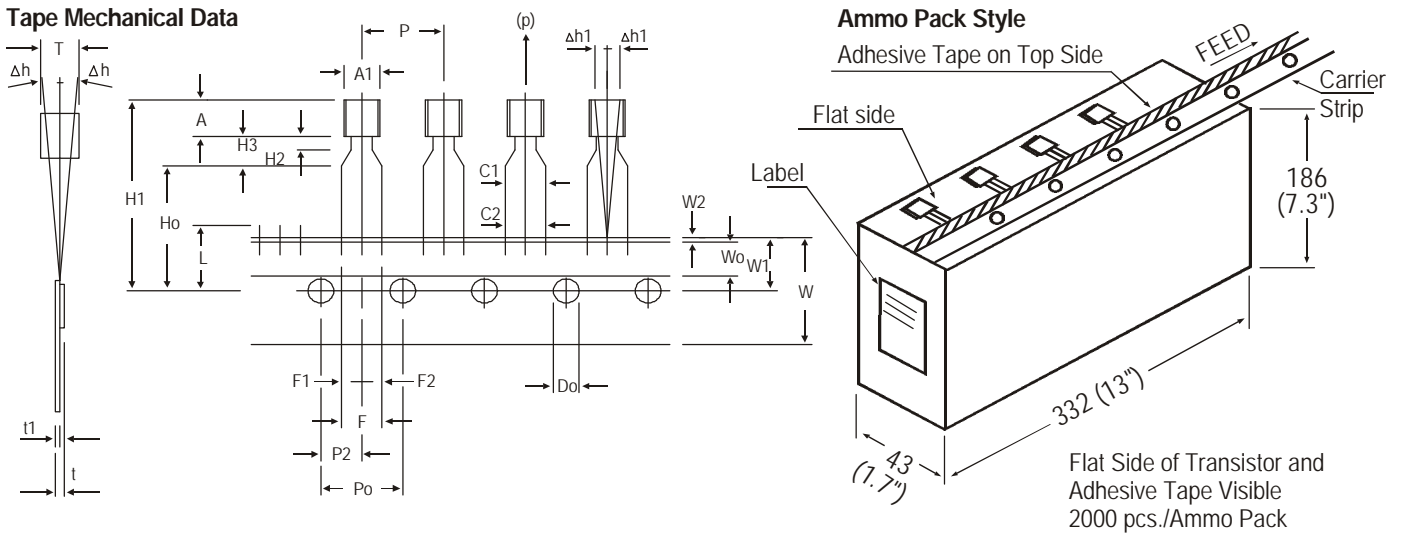

All dimensions are in mm

| ITEM | SYMBOL | SPECIFICATION | | | |
|---|---------|---------------|------|-------|----------------|
| | | MIN. | NOM. | MAX. | TOL. |
| BODY WIDTH | A1 | 4.0 | | 4.8 | |
| BODY HEIGHT | A | 4.8 | | 5.2 | |
| BODY THICKNESS | T | 3.9 | | 4.2 | |
| PITCH OF COMPONENT | P | | 12.7 | | ± 1.0 |
| *1 FEED HOLE PITCH | Po | | 12.7 | | ± 0.3 |
| *2 FEED HOLE CENTRE TO COMPONENT CENTRE | P2 | | 6.35 | | ± 0.4 |
| DISTANCE BETWEEN OUTER LEADS | F | | 5.08 | | + 0.6 - 0.2 |
| *3 COMPONENT ALIGNMENT SIDE VIEW | Δh | | 0 | 1.0 | |
| *4 COMPONENT ALIGNMENT FRONT VIEW | Δh1 | | 0 | 1.3 | |
| TAPE WIDTH | W | | 18 | | ± 0.5 |
| HOLD-DOWN TAPE WIDTH | W0 | | 6 | | ± 0.2 |
| HOLE POSITION | W1 | | 9 | | + 0.7 - 0.5 |
| HOLD-DOWN TAPE POSITION | W2 | | 0.5 | | ± 0.2 |
| LEAD WIRE CLINCH HEIGHT | Ho | | 16 | | ± 0.5 |
| COMPONENT HEIGHT | H1 | | | 23.25 | |
| LENGTH OF SNIPPED LEADS | L | | | 11.0 | |
| FEED HOLE DIAMETER | Do | | 4 | | ± 0.2 |
| *5 TOTAL TAPE THICKNESS | t | | | 1.2 | |
| LEAD - TO - LEAD DISTANCE | F1, F2 | | 2.54 | | + 0.4 - 0.1 |
| STAND OFF | H2 | 0.45 | | 1.45 | |
| CLINCH HEIGHT | H3 | | | 3.0 | |
| LEAD PARALLELISM | C1 - C2 | | | 0.22 | |
| PULL - OUT FORCE | (p) | 6N | | | |

NOTES

1. Maximum alignment deviation between leads will not to be greater than 0.2mm.
2. Maximum non-cumulative variation between tape feed holes shall not exceed 1 mm in 20 pitches.
3. Holddown tape will not exceed beyond the edge(s) of carrier tape and there shall be no exposure of adhesive.
4. There will be no more than three (3) consecutive missing components in a tape.
5. A tape trailer, having at least three feed holes are provided after the last component in a tape.
6. Splices should not interfere with the sprocket feed holes.

REMARKS

- *1 Cumulative pitch error 1.0 mm/20 pitch
- *2 To be measured at bottom of clinch
- *3 At top of body
- *4 At top of body
- *5 t1 0.3 – 0.6 mm

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-579 6150 Fax + 91-11-579 9569, 579 5290
e-mail sales@cdil.com www.cdil.com, www.cdilsemi.com