


**UNCOMPENSATED OPERATIONAL AMPLIFIER**


... designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- Low Input Offset Voltage — 3.0 mV max
- Low Input Offset Current — 60 nA max
- Large Power-Bandwidth — 20 V<sub>p-p</sub> Output Swing at 20 kHz min
- Output Short-Circuit Protection
- Input Over-Voltage Protection
- Class AB Output for Excellent Linearity
- High Slew Rate — 34 V/μs typ


**FIGURE 1 - HIGH SLEW-RATE INVERTER**

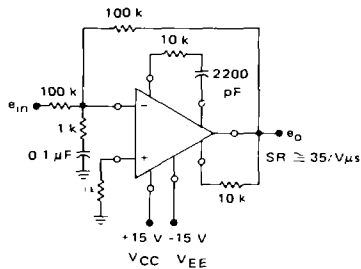

**FIGURE 2 - OUTPUT NULLING CIRCUIT**

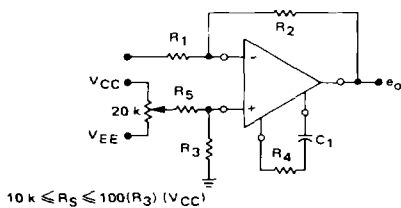


**FIGURE 3 - OUTPUT LIMITING CIRCUIT**

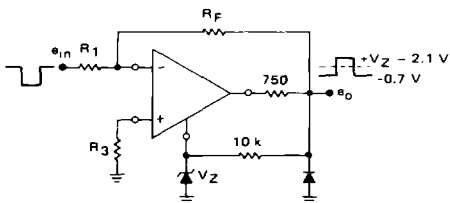


**OPERATIONAL AMPLIFIER**

**SILICON MONOLITHIC  
 INTEGRATED CIRCUIT**


**G SUFFIX  
 METAL PACKAGE  
 CASE 601**



(Top View)



**P1 SUFFIX  
 PLASTIC PACKAGE  
 CASE 626  
 (MC1439 Only)**



(Top View)

**ORDERING INFORMATION**

Device	Temperature Range	Package
MC1439G	0°C to +70°C	Metal Can Plastic DIP
MC1439P1		
MC1539G	-55°C to +125°C	Metal Can

# MC1439, MC1539

**ELECTRICAL CHARACTERISTICS** ( $V_{CC} = +15\text{ Vdc}$ ,  $V_{EE} = -15\text{ Vdc}$ ,  $T_A = +25^\circ\text{C}$  unless otherwise noted.)

2

Characteristic	Symbol	MC1539			MC1439			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Bias Current ( $T_A = +25^\circ\text{C}$ ) ( $T_A = T_{low}$ ①)	$I_{IB}$	—	0.20 0.23	0.50 0.70	—	0.20 0.23	1.0 1.5	$\mu\text{A}$
Input Offset Current ( $T_A = T_{low}$ ) ( $T_A = +25^\circ\text{C}$ ) ( $T_A = T_{high}$ ①)	$ I_{IO} $	—	— 20 —	75 60 75	—	— 20 —	150 100 150	nA
Input Offset Voltage ( $T_A = +25^\circ\text{C}$ ) ( $T_A = T_{low}, T_{high}$ )	$ V_{IO} $	—	1.0 —	3.0 4.0	—	2.0 —	7.5 —	mV
Average Temperature Coefficient of Input Offset Voltage ( $T_A = T_{low}$ to $T_{high}$ ) ( $R_S = 50\ \Omega$ ) ( $R_S \leq 10\ \text{k}\Omega$ )	$ TCV_{IO} $	—	3.0 5.0	—	—	3.0 5.0	—	$\mu\text{V}/^\circ\text{C}$
Input Impedance ( $f = 20\ \text{Hz}$ )	$z_{in}$	150	300	—	100	300	—	$\text{k}\Omega$
Input Common-Mode Voltage Range	$V_{ICR}$	$\pm 11$	$\pm 12$	—	$\pm 11$	$\pm 12$	—	$V_{pk}$
Equivalent Input Noise Voltage ( $R_S = 10\ \text{k}\Omega$ , Noise Bandwidth = 1.0 Hz, $f = 1.0\ \text{kHz}$ )	$e_n$	—	30	—	—	30	—	$\text{nV}/(\text{Hz})^{1/2}$
Common-Mode Rejection Ratio ( $f = 1.0\ \text{kHz}$ )	CMRR	80	110	—	80	110	—	dB
Open-Loop Voltage Gain ( $V_O = +10\ \text{V}$ , $R_L = 10\ \text{k}\Omega$ , $R_S = \infty$ ) ( $T_A = +25^\circ\text{C}$ to $T_{high}$ ) ( $T_A = T_{low}$ )	$A_{VOL}$	50,000 25,000	120,000 100,000	—	15,000 15,000	100,000 100,000	—	—
Power Bandwidth ( $A_v = 1$ , THD $\leq 5\%$ , $V_O = 20\ \text{V}_{pp}$ ) ( $R_L = 2.0\ \text{k}\Omega$ ) ( $R_L = 1.0\ \text{k}\Omega$ , $R_S = 10\ \text{k}\Omega$ )	PBW	—	20 50	—	10	50	—	kHz
Step Response { Gain = 1000, no overshoot R1 = 1.0 k $\Omega$ , R2 = 1.0 M $\Omega$ , R3 = 1.0 k $\Omega$ , R4 = 30 k $\Omega$ , R5 = 10 k $\Omega$ , C1 = 1000 pF }	$t_{THL}$ $t_{pd}$ SR	—	130 190 6.0	—	—	130 190 6.0	—	ns ns $\text{V}/\mu\text{s}$
{ Gain = 1000, 15% overshoot R1 = 1.0 k $\Omega$ , R2 = 1.0 M $\Omega$ , R3 = 1.0 k $\Omega$ , R4 = 0, R5 = 10 k $\Omega$ , C1 = 10 pF }	$t_{THL}$ $t_{pd}$ SR	—	80 100 14	—	—	80 100 14	—	ns ns $\text{V}/\mu\text{s}$
{ Gain = 100, no overshoot R1 = 1.0 k $\Omega$ , R2 = 100 k $\Omega$ , R3 = 1.0 k $\Omega$ , R4 = 10 k $\Omega$ , R5 = 10 k $\Omega$ , C1 = 2200 pF }	$t_{THL}$ $t_{pd}$ SR	—	60 100 34	—	—	60 100 34	—	ns ns $\text{V}/\mu\text{s}$
{ Gain = 10, 15% overshoot, R1 = 1.0 k $\Omega$ , R2 = 10 k $\Omega$ , R3 = 1.0 k $\Omega$ , R4 = 1.0 k $\Omega$ , R5 = 10 k $\Omega$ , C1 = 2200 pF }	$t_{THL}$ $t_{pd}$ SR	—	120 80 6.25	—	—	120 80 6.25	—	ns ns $\text{V}/\mu\text{s}$
{ Gain = 1, 15% overshoot, R1 = 10 k $\Omega$ , R2 = 10 k $\Omega$ , R3 = 5.0 k $\Omega$ , R4 = 390 $\Omega$ , R5 = 10 k $\Omega$ , C1 = 2200 pF }	$t_{THL}$ $t_{pd}$ SR	—	160 80 4.2	—	—	160 80 4.2	—	ns ns $\text{V}/\mu\text{s}$
Output Impedance ( $f = 20\ \text{Hz}$ )	$z_o$	—	4.0	—	—	4.0	—	$\text{k}\Omega$
Output Voltage Swing ( $R_L = 2.0\ \text{k}\Omega$ , $f = 1.0\ \text{kHz}$ ) ( $R_L = 1.0\ \text{k}\Omega$ , $f = 1.0\ \text{kHz}$ )	$V_O$	— $\pm 10$	— $\pm 13$	—	+10	+13	—	$V_{pk}$
Positive Supply Rejection Ratio ( $V_{EE}$ constant, $R_S = \infty$ )	PSRR+	—	50	150	—	50	200	$\mu\text{V}/\text{V}$
Negative Supply Rejection Ratio ( $V_{CC}$ constant, $R_S = \infty$ )	PSRR-	—	50	150	—	50	200	$\mu\text{V}/\text{V}$
Power Supply Current ( $V_O = 0$ )	$I_{CC}$ $I_{EE}$	—	3.0 3.0	5.0 5.0	—	3.0 3.0	6.7 6.7	mAdc

①  $T_{low} = 0^\circ\text{C}$  for MC1439,  $-55^\circ\text{C}$  for MC1539  
 $T_{high} = +70^\circ\text{C}$  for MC1439,  $+125^\circ\text{C}$  for MC1539

# MC1439, MC1539

**MAXIMUM RATINGS** ( $T_A = +25^\circ\text{C}$  unless otherwise noted.)

Rating	Symbol	Value	Unit	
Power Supply Voltage	$V_{CC}$	+18	Vdc	
	$V_{EE}$	+18	Vdc	
Differential Input Voltage Range	$V_{IDR}$	$\pm(V_{CC} +  V_{EE} )$	Vdc	
Common-Mode Input Voltage Range	$V_{ICR}$	$+V_{CC} -  V_{EE} $	Vdc	
Load Current	$I_L$	15	mA	
Output Short-Circuit Duration	$t_S$	Continuous		
Power Dissipation (Package Limitation)	$P_D$	680	mW	
		Metal Package Derate above $T_A = +25^\circ\text{C}$	4.6	mW/ $^\circ\text{C}$
		Plastic Dual In-Line Packages MC1439	625	mW
		Derate above $T_A = +25^\circ\text{C}$	5.0	mW/ $^\circ\text{C}$
Operating Temperature Range	$T_A$	MC1539	-55 to +125	$^\circ\text{C}$
		MC1439	0 to +70	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	Metal Packages	-65 to +150	$^\circ\text{C}$
		Plastic Packages	-55 to +125	$^\circ\text{C}$

FIGURE 4 – EQUIVALENT CIRCUIT SCHEMATIC

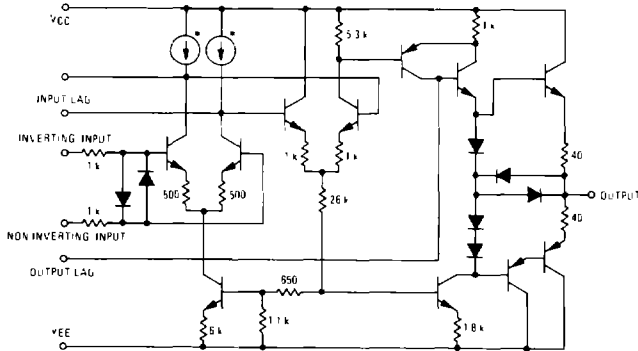


FIGURE 5 – EQUIVALENT CIRCUIT





FIGURE 6 – TEST CIRCUIT

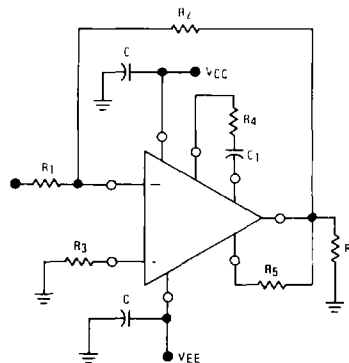

**TYPICAL OUTPUT CHARACTERISTICS**

$V_{CC} = +15 \text{ Vdc}$ ,  $V_{EE} = -15 \text{ Vdc}$ ,  $T_A = +25^\circ\text{C}$

FIGURE NO	CURVE NO	VOLTAGE GAIN	TEST CONDITIONS (FIGURE 5)					
			$R_1$ (k)	$R_2$ (k)	$R_3$ (k)	$R_4$ (k)	$R_5$ (k)	$C_1$ (pF)
1	1	0	0	0	0	0	0	0
	2	$10^4$	$10^4$	$10^4$	$5.0^4$	390	$10^4$	2200
	3	10	$10^4$	$10^4$	$10^4$	$10^4$	$10^4$	2200
	4	100	$10^4$	$100^4$	$10^4$	$10^4$	$10^4$	2200
	5	1000	$10^4$	$1.0^4$	$10^4$	$30^4$	$10^4$	1000
	6	1000	$10^4$	$1.0^4$	$10^4$	$10^4$	$10^4$	10
8	1	$A_{OL}$	0	0	0	$\infty$	$\infty$	0
	2	$A_{OL}$	0	0	0	390	$\infty$	2200
	3	$A_{OL}$	0	0	0	$10^4$	$\infty$	2200
	4	$A_{OL}$	0	0	0	$10^4$	$\infty$	2200
	5	$A_{OL}$	0	0	0	$30^4$	$\infty$	1000
13	1	10k	10k	5.0k	390	$10^4$	2200	
	ALL	10	$10^4$	$10^4$	$10^4$	$10^4$	2200	
	ALL	100	$10^4$	$100^4$	$10^4$	$10^4$	2200	
	ALL	1000	$10^4$	$1.0^4$	$10^4$	$30^4$	$10^4$	2200

# MC1439, MC1539

## TYPICAL CHARACTERISTICS (continued)

( $V_{CC} = +15$  Vdc,  $V_{EE} = -15$  Vdc,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

2

FIGURE 7 — LARGE-SIGNAL SWING versus FREQUENCY

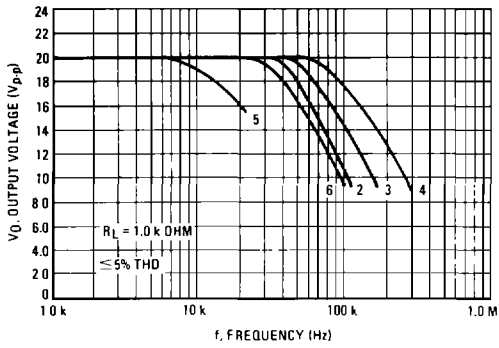


FIGURE 8 — OPEN-LOOP VOLTAGE GAIN versus FREQUENCY

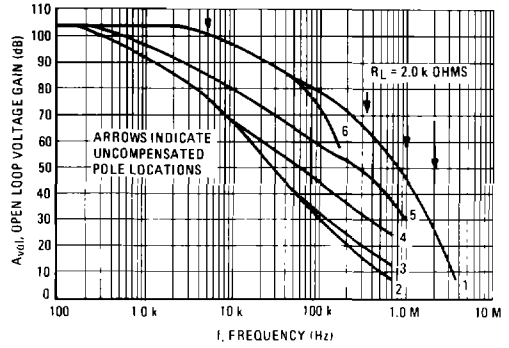


FIGURE 9 — OUTPUT VOLTAGE SWING versus LOAD RESISTANCE

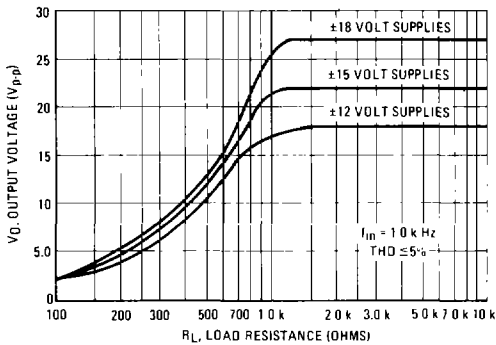


FIGURE 10 — OPEN-LOOP PHASE-SHIFT versus FREQUENCY

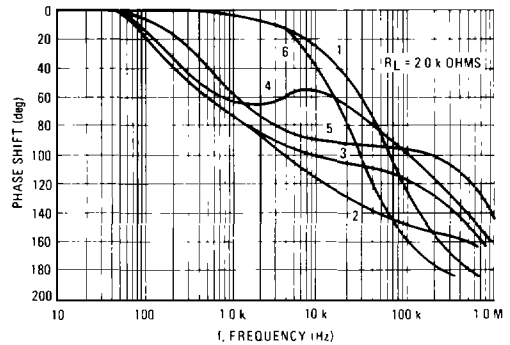


FIGURE 11 — OUTPUT VOLTAGE SWING (to clipping) versus SUPPLY


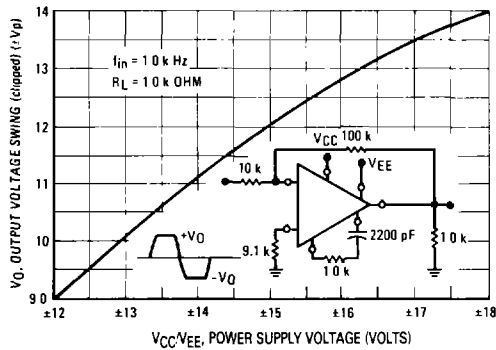


FIGURE 12 — CLOSED-LOOP GAIN versus FREQUENCY

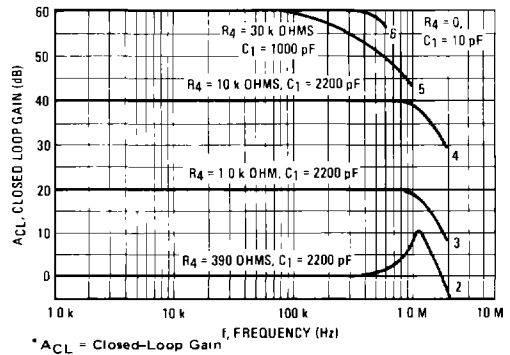

# MC1439, MC1539

## TYPICAL CHARACTERISTICS (continued)

( $V_{CC} = +15$  Vdc,  $V_{EE} = -15$  Vdc,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

FIGURE 13 –  $A_{CL} = 1$  RESPONSE versus TEMPERATURE

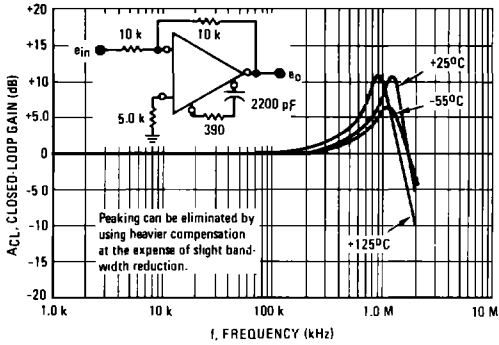


FIGURE 14 –  $A_{CL} = 10$  RESPONSE versus TEMPERATURE

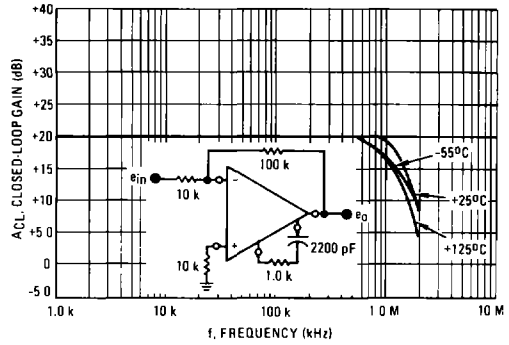


FIGURE 15 –  $A_{CL} = 100$  RESPONSE versus TEMPERATURE

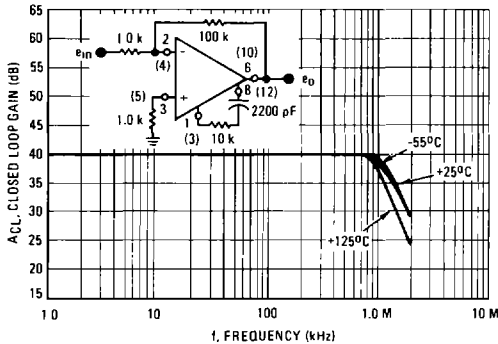


FIGURE 16 –  $A_{CL} = 1000$  RESPONSE versus TEMPERATURE



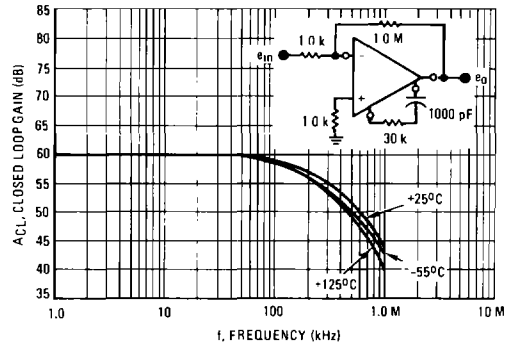


FIGURE 17 – SPECTRAL NOISE DENSITY

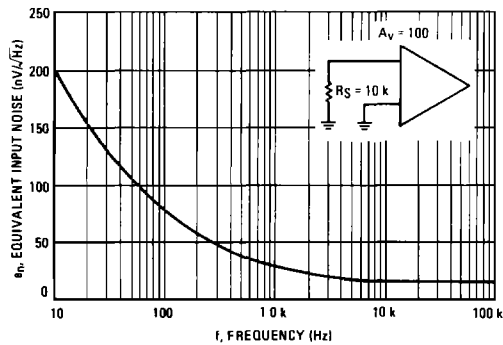

\*  $A_{CL}$  = Closed-Loop Gain

FIGURE 18 – OUTPUT NOISE versus SOURCE RESISTANCE

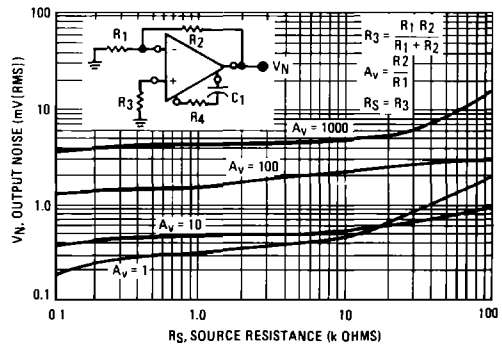

# MC1439, MC1539

## TYPICAL CHARACTERISTICS (continued)

( $V_{CC} = +15$  Vdc,  $V_{EE} = -15$  Vdc,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

2

FIGURE 19 – POWER DISSIPATION versus TEMPERATURE

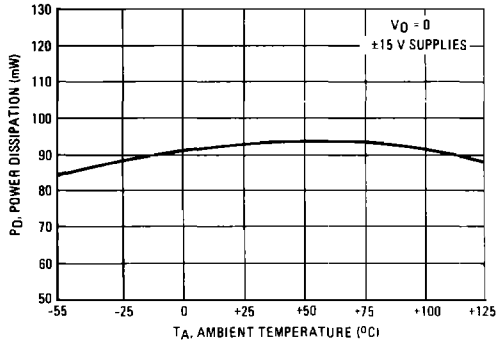


FIGURE 20 – POWER DISSIPATION versus POWER SUPPLY VOLTAGE

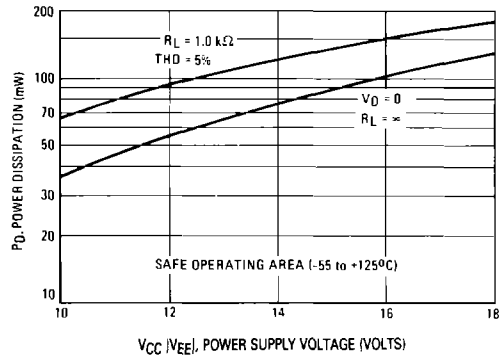


FIGURE 21 – POWER BANDWIDTH (LARGE SIGNAL SWING versus FREQUENCY)

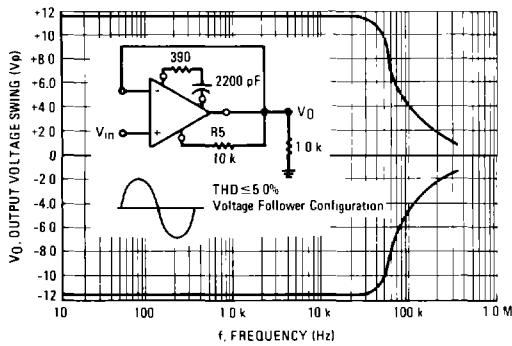


FIGURE 22 – COMMON-MODE INPUT VOLTAGE versus SUPPLY VOLTAGE

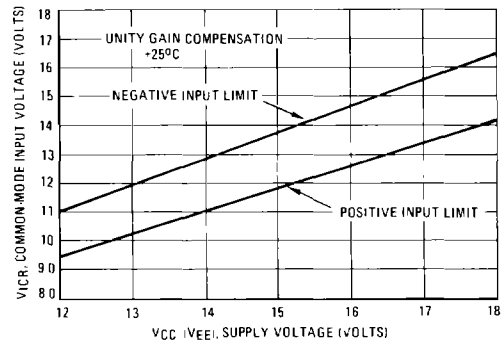


FIGURE 23 – COMMON-MODE REJECTION RATIO versus FREQUENCY



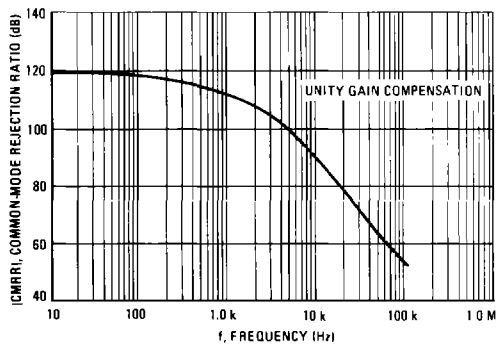


FIGURE 24 – COMMON-MODE REJECTION RATIO versus TEMPERATURE

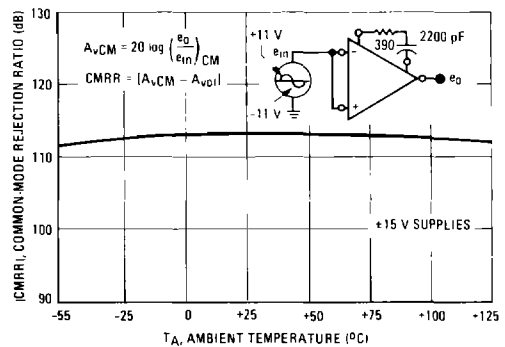

# MC1439, MC1539

FIGURE 25 – VOLTAGE-FOLLOWER PULSE RESPONSE

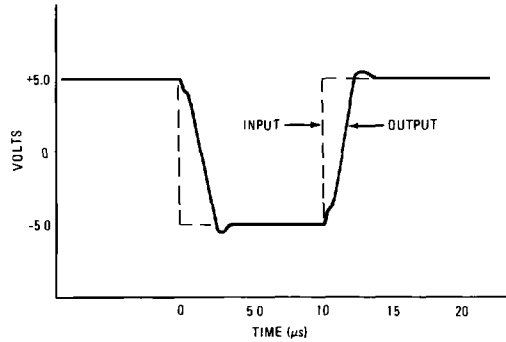

TYPICAL APPLICATIONS

FIGURE 26 – VOLTAGE FOLLOWER




FIGURE 27 – DIFFERENTIAL AMPLIFIER




FIGURE 28 – SUMMING AMPLIFIER





FIGURE 29 – +15 VOLT REGULATOR

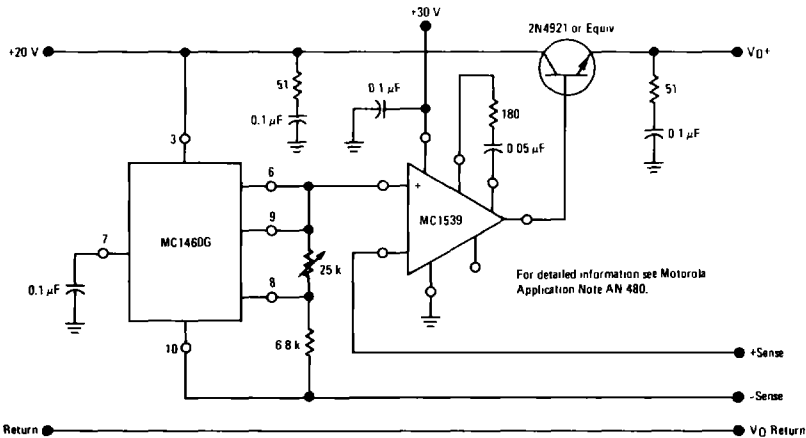

TYPICAL APPLICATIONS (continued)

FIGURE 30 – LOAD REGULATION FOR  
CIRCUIT OF FIGURE 29

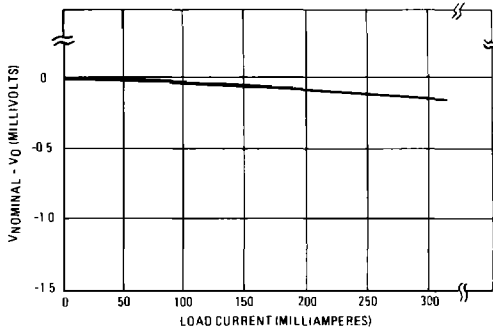


FIGURE 31 – REGULATOR OUTPUT VOLTAGE  
(under pulsed load condition)

