



RFMA5065-1W

ISSUE DATE 08/29/06


5.0 – 6.5 GHz Power Amplifier MMIC

FEATURES

- 5.0– 6.5GHz Operating Frequency Range
- 30dBm Output Power at 1dB Compression
- 37.0 dB Typical Power Gain @1dB Gain Compression
- -38dBc Maximum OIM3 @ Each Tone Pout 18.5dBm

APPLICATIONS

- Point-to-Point And Point-to-Multipoint Radio
- Military Radar Systems



Caution! ESD sensitive device.

ELECTRICAL CHARACTERISTICS (Tb = 25 °C, 50 ohm, Vdd=7V, Vgg=-5V)

SYMBOL	PARAMETER/TEST CONDITIONS	MIN	TYP	MAX	UNITS
F	Operating Frequency Range	5.0		6.5	GHz
P1dB	Output Power at 1dB Gain Compression	28.5	30		dBm
G1dB	Gain @1dB gain compression	31.0	37.0		dB
OIMD3	Output 3 rd Order Intermodulation Distortion @Δf=10MHz, Each Tone Pout 18.5dBm		-41	-38	dBc
Input RL	Input Return Loss		-12	-6	dB
Output RL	Output Return Loss		-6		dB
Idd	Drain Current @small signal output power level		950	1100	mA
Vdd	Drain Supply Voltage		7		V
Vgg	Gate Supply Voltage		-5		V
Rth	Thermal Resistance		7		°C/W
Tb	Operating Base Plate Temperature	-30		+80	°C

MAXIMUM RATINGS @25°C^{1,2}

SYMBOL	CHARACTERISTIC	ABSOLUTE	CONTINUOUS ^{1,2}
V _{DD}	Drain Supply Voltage	10V	8V
V _{GG}	Gate Supply Voltage	-8V	-3 V
I _{DQ}	Quiescent Drain Current	I _{dss}	1.1A
I _{GG}	Gate Current	60mA	30 mA
P _{IN}	Input Power	20dBm	@ 3dB compression
T _{CH}	Channel Temperature	175°C	150°C
T _{STG}	Storage Temperature	-65/175°C	-65/150°C
P _T	Total Power Dissipation	15W	12.6W

Notes:


1. Operating the device beyond any of the above rating may reduce MTTF and cause permanent damage.
2. Bias conditions must also satisfy the following equation $V_{dd} * I_{dd} < (T_{CH} - T_b) / R_{TH}$

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
 Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 1 of 2
 Revised August 2006

03 Package Outline

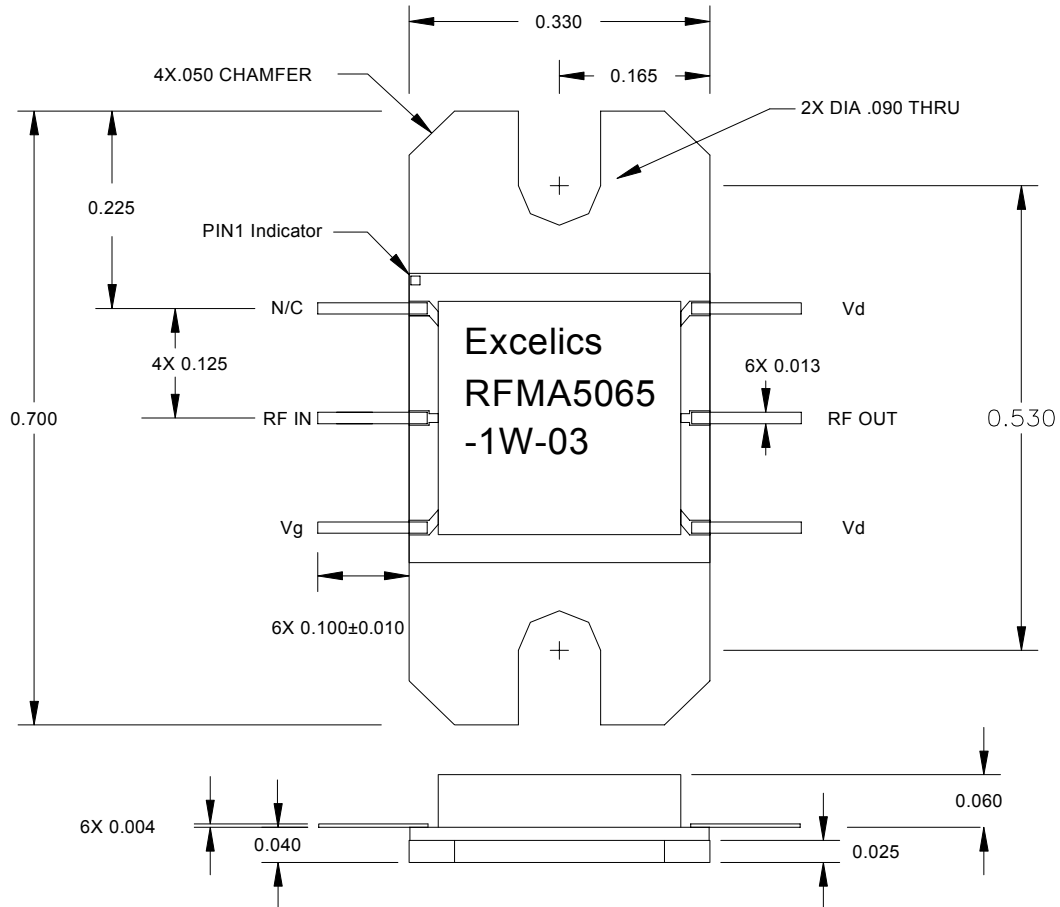

DIMENSION: INCH
TOLERANCE: ±0.005

ORDERING INFORMATION

Part Number	
RFMA5065-1W-03	Refer 03 Package Outline

Specifications are subject to change without notice.