
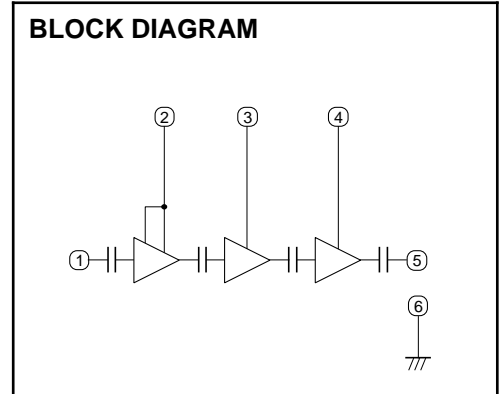


MITSUBISHI RF POWER MODULE
M68769L

400-450MHz, 12.5V, 45W, FM MOBILE RADIO

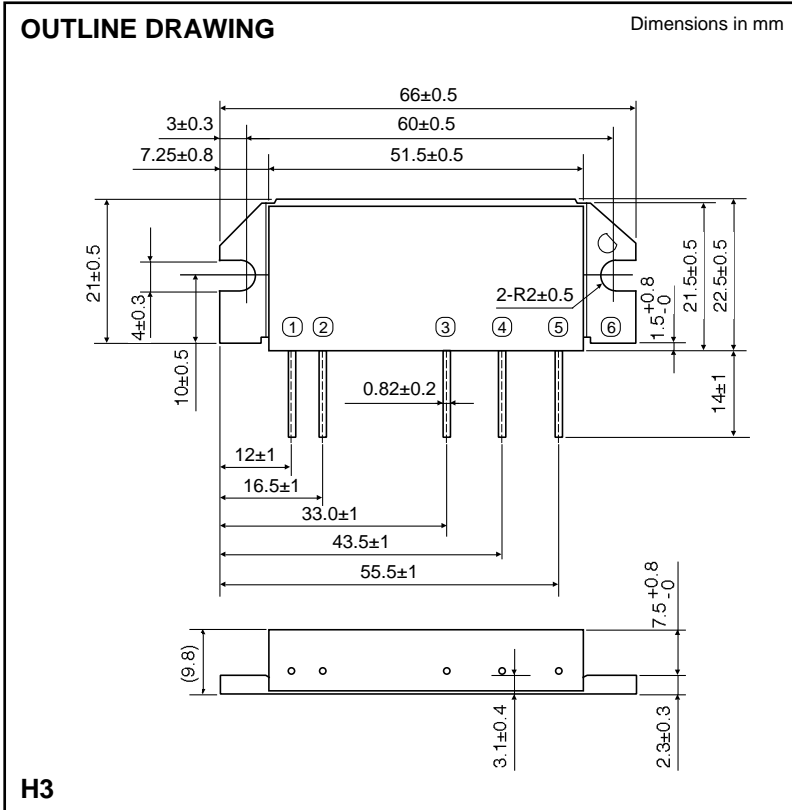

- PIN:
- ① Pin : RF INPUT
 - ② VCC1: 1st. DC SUPPLY
 - ③ VCC2: 2nd. DC SUPPLY
 - ④ VCC3: 3rd. DC SUPPLY
 - ⑤ Po : RF OUTPUT
 - ⑥ GND: FIN

ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
VCC	Supply voltage	ZG=ZL=50	17	V
Icc	Total current	ZG=ZL=50	15	A
P _{in} (max)	Input power	ZG=ZL=50 , VCC1 12.5V	600	mW
P _O (max)	Output power	ZG=ZL=50 , VCC1 12.5V	60	W
T _C (OP)	Operation case temperature	ZG=ZL=50 , VCC1 12.5V	-30 to +110	°C
T _{stg}	Storage temperature		-40 to +110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range	VCC=12.5V, P _{in} =300mW, ZG=ZL=50	400	450	MHz
P _O	Output power		45		W
η	Total efficiency		35		%
2f _o	2nd. harmonic			-30	dBc
3f _o	3rd. harmonic			-30	dBc
in	Input VSWR			2.8	-
-	Load VSWR tolerance	VCC=15.2V, P _O =45W(P _{in} :controlled) ZG=50 , Load VSWR=8:1 (All phase)	No degradation or destroy		-

Note. Above parameters, ratings, limits and test conditions are subject to change.