

RGP10A - RGP10M

PRV : 50 - 1000 Volts
Io : 1.0 Ampere


FEATURES :

- * High current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : DO-41 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.339 gram

FAST RECOVERY RECTIFIERS

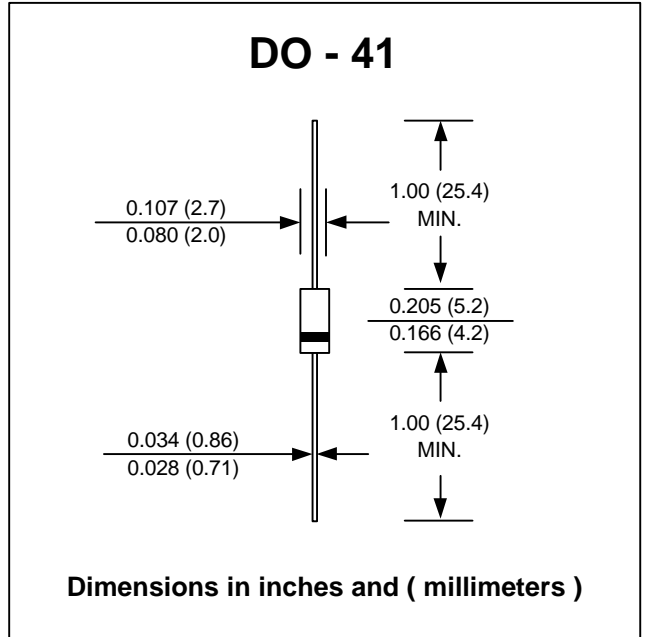

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	RGP 10A	RGP 10B	RGP 10D	RGP 10G	RGP 10J	RGP 10K	RGP 10M	UNIT	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V	
Maximum Average Forward Current 0.375"(9.5mm) Lead Length Ta = 55 °C	IF(AV)	1.0								A
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	IFSM	30								A
Maximum Peak Forward Voltage at If = 1.0 A	VF	1.3								V
Maximum Full load Reverse Current, Full Cycle Average 0.375",(9.5mm) Lead Length Ta = 55°C	IR(AV)	100								µA
Maximum DC Reverse Current Ta = 25 °C	IR	5.0								µA
at Rated DC Blocking Voltage Ta = 150 °C	IR(H)	200								µA
Maximum Reverse Recovery Time (Note 1)	Trr	150			250		500		ns	
Typical Junction Capacitance (Note 2)	CJ	15								pf
Typical Thermal Resistance (Note 3)	RθJA	50								°C/W
Junction Temperature Range	TJ	- 65 to + 175								°C
Storage Temperature Range	TSTG	- 65 to + 175								°C

Notes :

- (1) Reverse Recovery Test Conditions : If = 0.5 A, IR = 1.0 A, Irr = 0.25 A.
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Vdc
- (3) Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) Lead Lengths, P.C. Board Mounted.

RATING AND CHARACTERISTIC CURVES (RGP10A - RGP10M)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

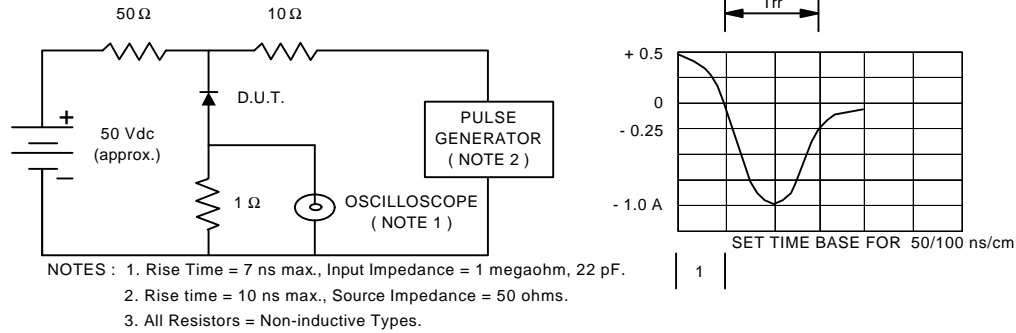


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

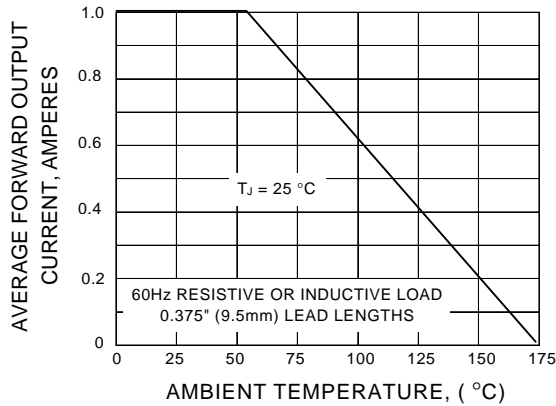


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

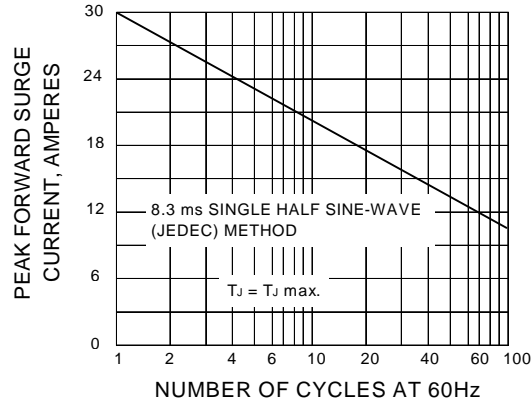


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

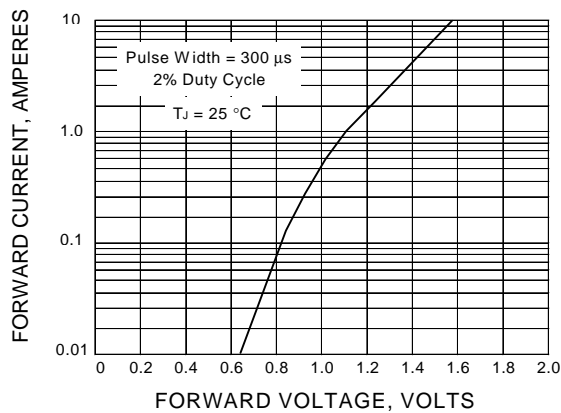


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

