

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

MITSUBISHI SEMICONDUCTOR <GaAs FET>

MGFL45V1920A

1.9 - 2.0GHz BAND 32W INTERNALLY MATCHED GaAs FET

DESCRIPTION

The MGFL45V1920A is an internally impedance-matched GaAs power FET especially designed for use in 1.9 - 2.0 GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

FEATURES

- Class A operation
- Internally matched to 50(ohm) system
- High output power
P1dB = 32W (TYP.) @ f=1.9 - 2.0 GHz
- High power gain
GLP = 13 dB (TYP.) @ f=1.9 - 2.0GHz
- High power added efficiency
P.A.E. = 45 % (TYP.) @ f=1.9 - 2.0GHz
- Low distortion [item -51]
IM3=-45dBc(TYP.) @ Po=34.5dBm S.C.L.

APPLICATION


- item 01 : 1.9 - 2.0 GHz band power amplifier
- item 51 : 1.9 - 2.0 GHz band digital ratio communication

QUALITY GRADE

IG

RECOMMENDED BIAS CONDITIONS

- VDS = 10 (V)
- ID = 6.5 (A)
- RG=25 (ohm)

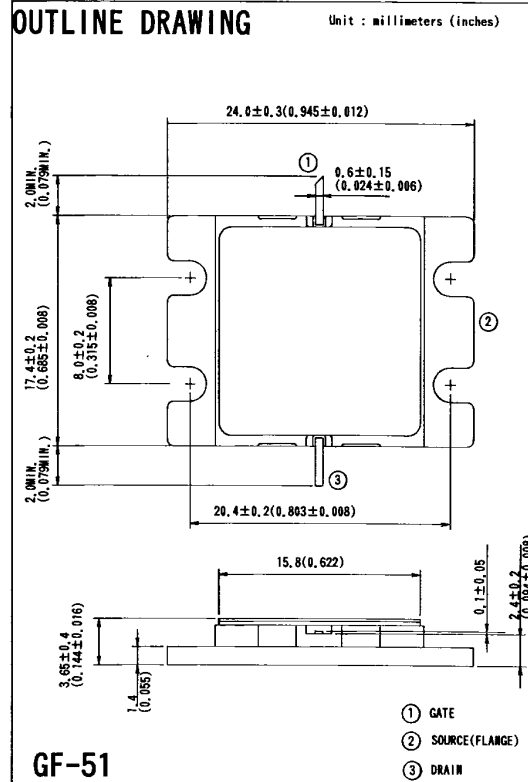

ABSOLUTE MAXIMUM RATINGS

(Ta=25deg.C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain voltage	-15	V
VGSO	Gate to source voltage	-15	V
ID	Drain current	22	A
IGR	Reverse gate current	-61	mA
IGF	Forward gate current	76	mA
PT *1	Total power dissipation	100	W
Tch	Channel temperature	175	deg.C
Tstg	Storage temperature	-65 / +175	deg.C

*1 : Tc=25deg.C

< Keep safety first in your circuit designs! >
Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary circuits, (2) use of non-flammable material or (3) prevention against any malfunction or mishap.

ELECTRICAL CHARACTERISTICS

(Ta=25deg.C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
VGS(off)	Saturated drain current	VDS = 3V , ID = 60mA	-	-	-5	V
P1dB	Output power at 1dB gain compression	VDS=10V, ID(RF off)=6.5A, f=1.9 - 2.0GHz	44	45	-	dBm
GLP	Linear power gain		12	13	-	dB
ID	Drain current		-	7.5	-	A
P.A.E.	Power added efficiency		-	45	-	%
IM3 *2	3rd order IM distortion		-42	-45	-	dBc
Rth(ch-c) *3	Thermal resistance	delta Vf method	-	-	1.5	deg.C/W

*2 : item -51,2 tone test, Po=34.5dBm Single Carrier Level, f=1.9,2.1,2.0GHz, delta f=5MHz

*3 : Channel-case



**MITSUBISHI
ELECTRIC**

Nov. '99